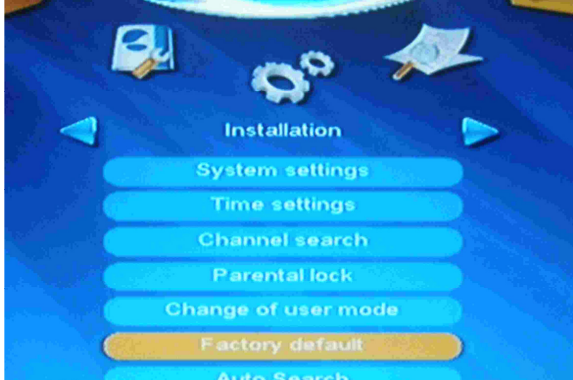
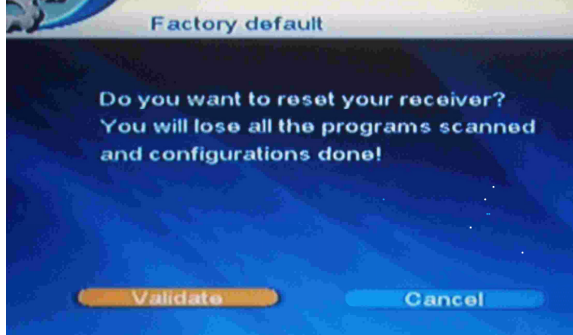
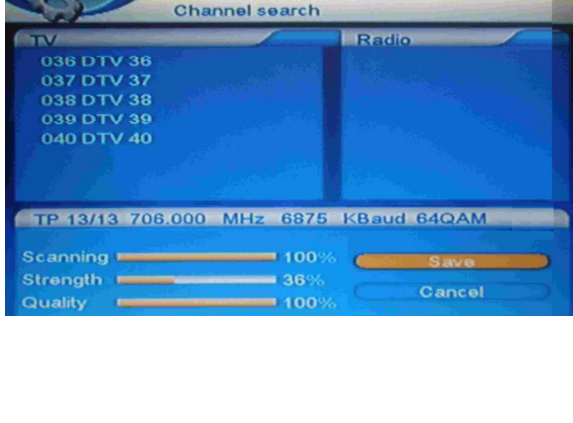
	<p style="text-align: center;"><u>How to Scan new channels for CJJV</u></p> <p>Set the UHF Receiver to Factory Default.</p> <ol style="list-style-type: none"> 1. On the Remote Control unit, press Menu button. 2. Press > RIGHT button; go to Installation folder.
	<ol style="list-style-type: none"> 3. Press DOWN button; scroll to Factory Default. 4. Press OK. 5. Prompt to Validate will appear, press OK.
	<p style="text-align: center;"><u>Pioneer Camp UHF Digital TV</u></p> <ol style="list-style-type: none"> 1. Set the UHF Receiver to Factory Default. <ul style="list-style-type: none"> • On the Remote Control unit, press Menu button. • Press > RIGHT button; go to Installation folder. • Press DOWN button; scroll to Factory Default. • Press OK. • Prompt to Validate will appear, press OK.
	<ol style="list-style-type: none"> 2. Using the Number key, enter the following parameters below. Press arrow RIGHT / DOWN button to scroll / select values. <ul style="list-style-type: none"> • Start Frequency: 599.500 • End Frequency: 690.500 • Band Width: 7(press RIGHT button to select) • Symbol rate: 5970 • Modulation: 64QAM • Search all CHs (press OK) 3. Press OK to SAVE New Channels. 4. Exit Menu Set Up, press EXIT button.